\$561,318

Lot 115, Moresby Street, Land size 501.6 sqm²



Specifications











GARAGE
6000 x 3110

FAMILY
GEORGE
6000 x 3100

FAMILY
FAM

Fujits u s plit system aircon x 2 (2.5kw unit to main bed, 6.0 kw to living

Landscaping including:

Kikuyu turf to front (including natures trip), rear and sides

- * (1No.) native tree
- * Up to 20m2 of garden soil, pine mulch and 150mm-300mm native plants
- * Wall mounted clothes line
- * Brick letterbox with metal insert, painted render finish and house number
- * 1800mm high fencing in colorbond pale eucalypt or mist green or similar color
- * (1No.) 1800 mm high x 900 mm wide in colorbond pale eucalypt or mist green or similar color gate to side of home
- $\mbox{\ensuremath{^{\star}}}$ Flys creens and roller blinds to Windows.
- * Ceiling fans to the bedrooms
- \star 5000 L rainwater tank in lieu of standard

3	2 🍙 1
Property Type	House & Land
Contract Type	2 Part Contract
Titled	Yes
Land Area	501.6 sqm
Total House Area	147.38 sqm
Land Price	\$216,000
House Price	\$345,318
Total Price	\$561,318
Design	Mars den 16
Facade	Casa



\$2,000

Met Basics

Sales Partner: Gilbert Elliott


0418 792 215

Reservation Deposit

Specification

gil@positiveincome.com.au



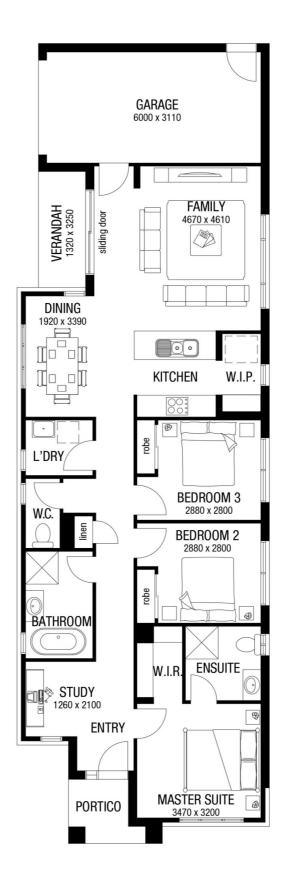



STANDARD INCLUSIONS



PRE-CONSTRUCTION

- HI fixed price contract, plans and specifications
- Contour survey, Engineer's soil report and slab design Council building application fees (Standard applications, excluding town planning, relaxations etc.
- Contour survey
- Pre-determined colour scheme by Metricon Studio M décor designers

SITE WORKS, FOUNDATIONS & CONNECTIONS

- Balanced cut & fill excavation for up to 1000mm site fall over the building platform Waffle pod concrete slab up to H2 soil classification
- Piering (if required) to suit balanced cut & fill excavation for up to 1000mm site fall over the building platform
- Termite treatment (reticulated and rechargeable perimeter systems)
 Sewer and stormwater connections to existing serviceable connection points
- Electrical mains
- Water connection from pre-tapped water main
- House constructed for N2 wind rating conditions (W33) 3000L Slimline rainwater tank, including concrete slab, pump, connections & recycled water plumbing to WC's, (1No.) external tap and Laundry No allowance is made for retaining walls

ENERGY EFFICIENCY

- Ceiling insulation batts rating R4.1 to ceiling area as required
- Roof sarking under all tile or metal roof areas. Sisalation "Wall-wrap" and R2.0 insulation batts to external stud walls (includes R2.0 insulation batts to Garage/House internal walls)
- Chromagen 170 litre heat pump hot water unit 500 KPA water pressure limiting device

FRAME, BRICKS, WINDOWS, ROOF TILES & GARAGE

- Termite resistant frame and truss system Clay bricks from the builder's standard range
- Off white coloured mortar with ironed joints

 Powder coated aluminium windows in the standard builder's range of colours with clear glass and locks to openable windows
 Obscure glazing to all wet area windows.
 Concrete roof tiles in the standard builder's range of colours / profiles
- Colorbond® panelift door to the front facade of the garage in the standard builder's range of colours
- Colorbond® fascia and gutter in the standard builder's range of profiles and colours
- Painted PVC downpipes to suit rainwater tank (if applicable) OR Colorbond® downpipes in the standard builder's range of profiles and colours

EXTERNAL FEATURES

- Painted timber entry door frames sidelights, if applicable, in clear glass 2040mm high x 820mm wide Hume XN1 clear glazed painted external front entry hinged door with clear glass 2040mm high x 820mm wide Hume Glass Opening XF3 painted hinged external
- door with clear glass to other external doors (if applicable)
 Lane Caletta entrance lever set to hinged external doors (including Garage/house
- access door
- Lane Specifier series double cylinder deadbolt to external hinged doors
- Slab rebate to all standard external sliding doors
 Two (2) coat external paint system to external trim and doors using Dulux paints to manufacturers standard specifications
- Two (2) external wall garden hose taps
- Integrated plain concrete slab to Portico/Porch and Outdoor Room (if applicable)
- External builders house clean
- Site clean after construction

KITCHEN FEATURES

- 20mm Caesarstone bench tops, selected from the builder's standard range
- Laminate finish overhead cupboard (up to 800mm wide with side hinged doors) to each side of rangehood
- Laminate finish cupboards in the standard builder's range of laminates and door
- Contrasting laminate colour

- Microwave provision, including single power point and single pot drawer below Dishwasher provision, including single power point and plumbing point 600mm Bellissimo by Technika TB60FDTSS-5 stainless steel/black glass electric
- 600mm Technika CFM641-2 electric cooktop 600mm Technika CHEM52A6S-2 stainless steel canopy rangehood
- Base Mk3 1200mm, 1% end bowl stainless steel sink Base Mk2 upswept kitchen sink mixer tap

LAUNDRY FEATURES

- Base 42L trough and cabinet
- Base Mk2 upswept sink mixer tap Chrome square floor waste

BATHROOM, ENSUITE & TOILETS

- 20mm Caesarstone bench tops, selected from the builder's standard range
- Laminate finish vanities in the standard Builders range of laminates & door handles. Clear toughened glass shower screens with powder coated
- aluminium frames in the standard builder's range of colours 1100mm high mirrors with powder coated aluminium frames seated on vanity to match vanity width
- Base inset 540 oval, white vitreous china basin with chrome waste Base 1560mm freestanding bath with chrome waste
- Base Mk2 basin mixers
- Base Mk2 shower mixer
- Base rail shower
- Base Mk2 bath mixer with Posh Solus 220mm wall bath spout
- Phoenix "Gen X" range towel rails/rings and toilet roll holders in chrome Posh Domaine white vitreous china close coupled rimless toilet with soft close quick release seat
- Chrome square floor wastes where required.

CERAMIC TILING

- Ceramic tiles Selected from standard builder's range
- Standard wet areas as nominated on the Master Plan Bathroom and Ensuite are 2000mm high to showers 1200mm to walls
- adjacent to bath skirting tiles Kitchen splashback. Laundry and toilet floors splashback over tub skirt tile
- Main floor (refer working drawings), Portico/Porch, Outdoor Room (where applicable) No allowance has been made for frieze or decorator tiles
- No allowance has been made for laying of border tiles, 45 degree patterns or floor feature

ELECTRICAL

- Earth leakage safety switch and circuit breakers Single phase underground power provision from existing supply point
- Meter box will be installed on the side nearest mains connection point One (1) double power point to each room
- LED downlights throughout (excluding Kitchen and Garage)
 LED ceilling mounted light to Kitchen
 LED downlights above Kitchen Island bench
 Strip fluorescent light with diffuser to Garage

- Two (2) external light points
- Home Network Lite package, including an enclosure, NBN provision, one (1) phone point, two (2) TV points & three (3) data points
- Smoke detectors hard wired with battery backup as per BCA requirements

INTERNAL FEATURES

- 2400mm (nominal) ceiling height throughout to single and double storey homes Carpet grade staircase with paint grade maple hand rail and stainless steel balusters to double storey homes
 Category 1 range carpet including standard foam underlay (refer working drawings)
 Internal Hume 2040mm high flush panel passage doors
 Door stops standard builder's range

- Lane Caletta internal door furniture

- Aluminium framed Polytec melamine 2065mm high sliding robe doors (flush panel hinged doors to walk in robes)
 Shelving robes: one white melamine shelf with hanging rail. Broom: one white melamine shelf. Pantry/Linen: four white melamine shelves. Skirtings and architraves are 66mm high (nominal) paint finish as per builder's standard
- 90mm cove cornice throughout home
- Internally, three (3) coat internal paint system using Dulux Professional paints 2 colours allowed (i.e. 1 colour to walls & 1 colour to timber work) to paint manufacturers standard specifications. Two (2) coats to ceiling using Dulux Professional ceiling white paint to paint manufacturer's standard specifications

WARRANTIES

- 3 months maintenance period
- Statutory structural guarantee period Builders Lifetime structural guarantee
- Metricon reserve the right to alter any of the above specifications due to continuing product development or availability of items.

Signature of Client			
Signature of Client	1.5	×	: ±
Date	76	12	

Effective: 13/06/2019



KITCHEN BENCHTOP Caesarstone 20mm Ice Snow



KITCHEN BASE CABINETRY Laminex Oyster Grey



KITCHEN OVERHEAD CABINETRY Laminex Lustrous Em



KITCHEN KICKER Formica Stainless Steel



TILED SPLASHBACK Cafe Matt White BELWP300



WET AREA BENCHTOP (Excludes Laundry)
Caesarstone 20mm Ice Snow



WET AREA BASE CUPBOARDS/KICKER (Excludes Laundy) Laminex Lustrous Elm




TILE MAIN FLOOR Promenade White NT15-6150FL



TILES WET A REA (Floor and walls) Promenade White NT15-6150FL



CARPET Esperance/Pine Grove



CEILING Dulux Lexicon Half







BLOCK OUT BLIND Niagara Zen Gravity



ROBE DOOR POLYTEC MELAMINE COLOUR Classic White

Initial _____/___

Gun Metal





initial